RED®
ÜBERZEUGT. EINFACH.

Wärmeschrumpfschlauch 3:1 Box, 1,5/0,5 mm, schwarz, 10 m



4 046725 357889

Leistungsmerkmale

Der dünnwandige Wärmeschrumpfschlauch 3:1 aus vernetztem Polyolefin ist flexibel und flammwidrig. Dank der idealen Schrumpfrate 3:1 decken diese Schrumpfschläuche mit nur wenigen Größen einen breiten Anwendungsbereich ab.

Die Lieferung des RED Wärmeschrumpfschlauchs erfolgt in einer praktischen Spenderbox. Das auf der Kartonage integrierte Zentimetermaß ermöglicht es, Abschnitte schnell und präzise für die aktuell auszuführende Arbeit abzumessen und abzuschneiden. Die Box ist zudem bei Transport sowie Lagerung platzsparend und hält die Ware frei von Staub und Schmutz. Perfekt für variierende Isolierungsarbeiten im Werk oder vor Ort.

Technische Daten:
- Lagerung: -10 °C bis +40 °C, rel. Luftfeuchtigkeit: <75 %
- Haltbarkeit: 24 Monate

DEHA-Nummer
5116531

Artikelnummer
2230-10-0001

EAN
4046725357889

Kennzeichnung


GEWÄHRLEISTUNG 5 JAHRE


Wärmeschrumpfschlauch 3:1 Box, 1,5/0,5 mm, schwarz, 10 m


Allgemeine Daten

Merkmale	
Typ	Warmschrumpf
Ausführung	dünnwandig
Schrumpfrate	3:1
Innendurchmesser vor Schrumpf	1,5 mm
Innendurchmesser nach Schrumpf	0,5 mm
Nenndurchmesser in Zoll	1/16
Wandstärke nach Schrumpf	0,45 mm
Länge	10 m
Betriebstemperatur	-55 - 125 °C
Farbe	schwarz
Werkstoff	Polyolefin
UL-Zulassung	ja

Produktabbildungen

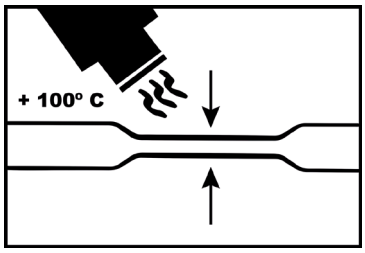





Bestelldaten

DEHA-Nr.	Typ	Artikelnummer	EAN	VPE
5116531	WSB 3:1 Box 1.5-0.5	2230-10-0001	4046725357889	1 Stück

Data Sheet

RED®

SIMPLY. CONVINCING.

Heat-shrink tubing 3:1 Box, 1.5/0.5 mm, black, 10 m



4 046725 357889

Performance features

The thin-walled 3:1 cross-linked polyolefin heat-shrink tubing is flexible and flame-retardant. Thanks to the ideal shrink ratio of 3:1, these shrink tubes cover a wide range of applications with just a few sizes.

The RED heat shrink tubing is delivered in a practical dispenser box. The centimeter ruler integrated on the cardboard box makes it possible to quickly and precisely measure and cut sections for the current work to be carried out. The box also saves space during transport and storage and keeps the goods free of dust and dirt. Perfect for varied insulation work at the factory or on site.

Technical specifications:

- Storage: -10 °C to +30 °C, rel. Humidity: <75%
- Shelf life: 24 months

DEHA number

5116531

Item number

2230-10-0001

EAN

4046725357889

label




SIMPLY. CONVINCING.


Heat-shrink tubing 3:1 Box, 1.5/0.5 mm, black, 10 m


General Data

Features	
Type	Heat-shrink
Model	Thin-walled
Shrink rate	3:1
Inner diameter before heat-shrink	1,5 mm
Inner diameter after heat-shrink	0,5 mm
Nominal diameter inch	1/16
Wall thickness after shrinking	0,45 mm
Length	10 m
Operation temperature	-55 - 125 °C
Colour	Black
Material	Polyolefin
UL approval	yes

Product pictures

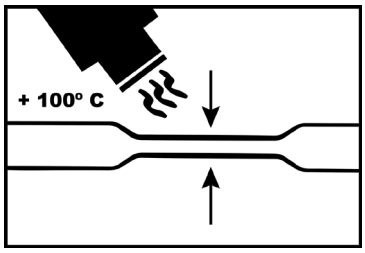





Order Data

DEHA no	Type	Item number	EAN	VPE
5116531	WSB 3:1 Box 1.5-0.5	2230-10-0001	4046725357889	1 Piece